
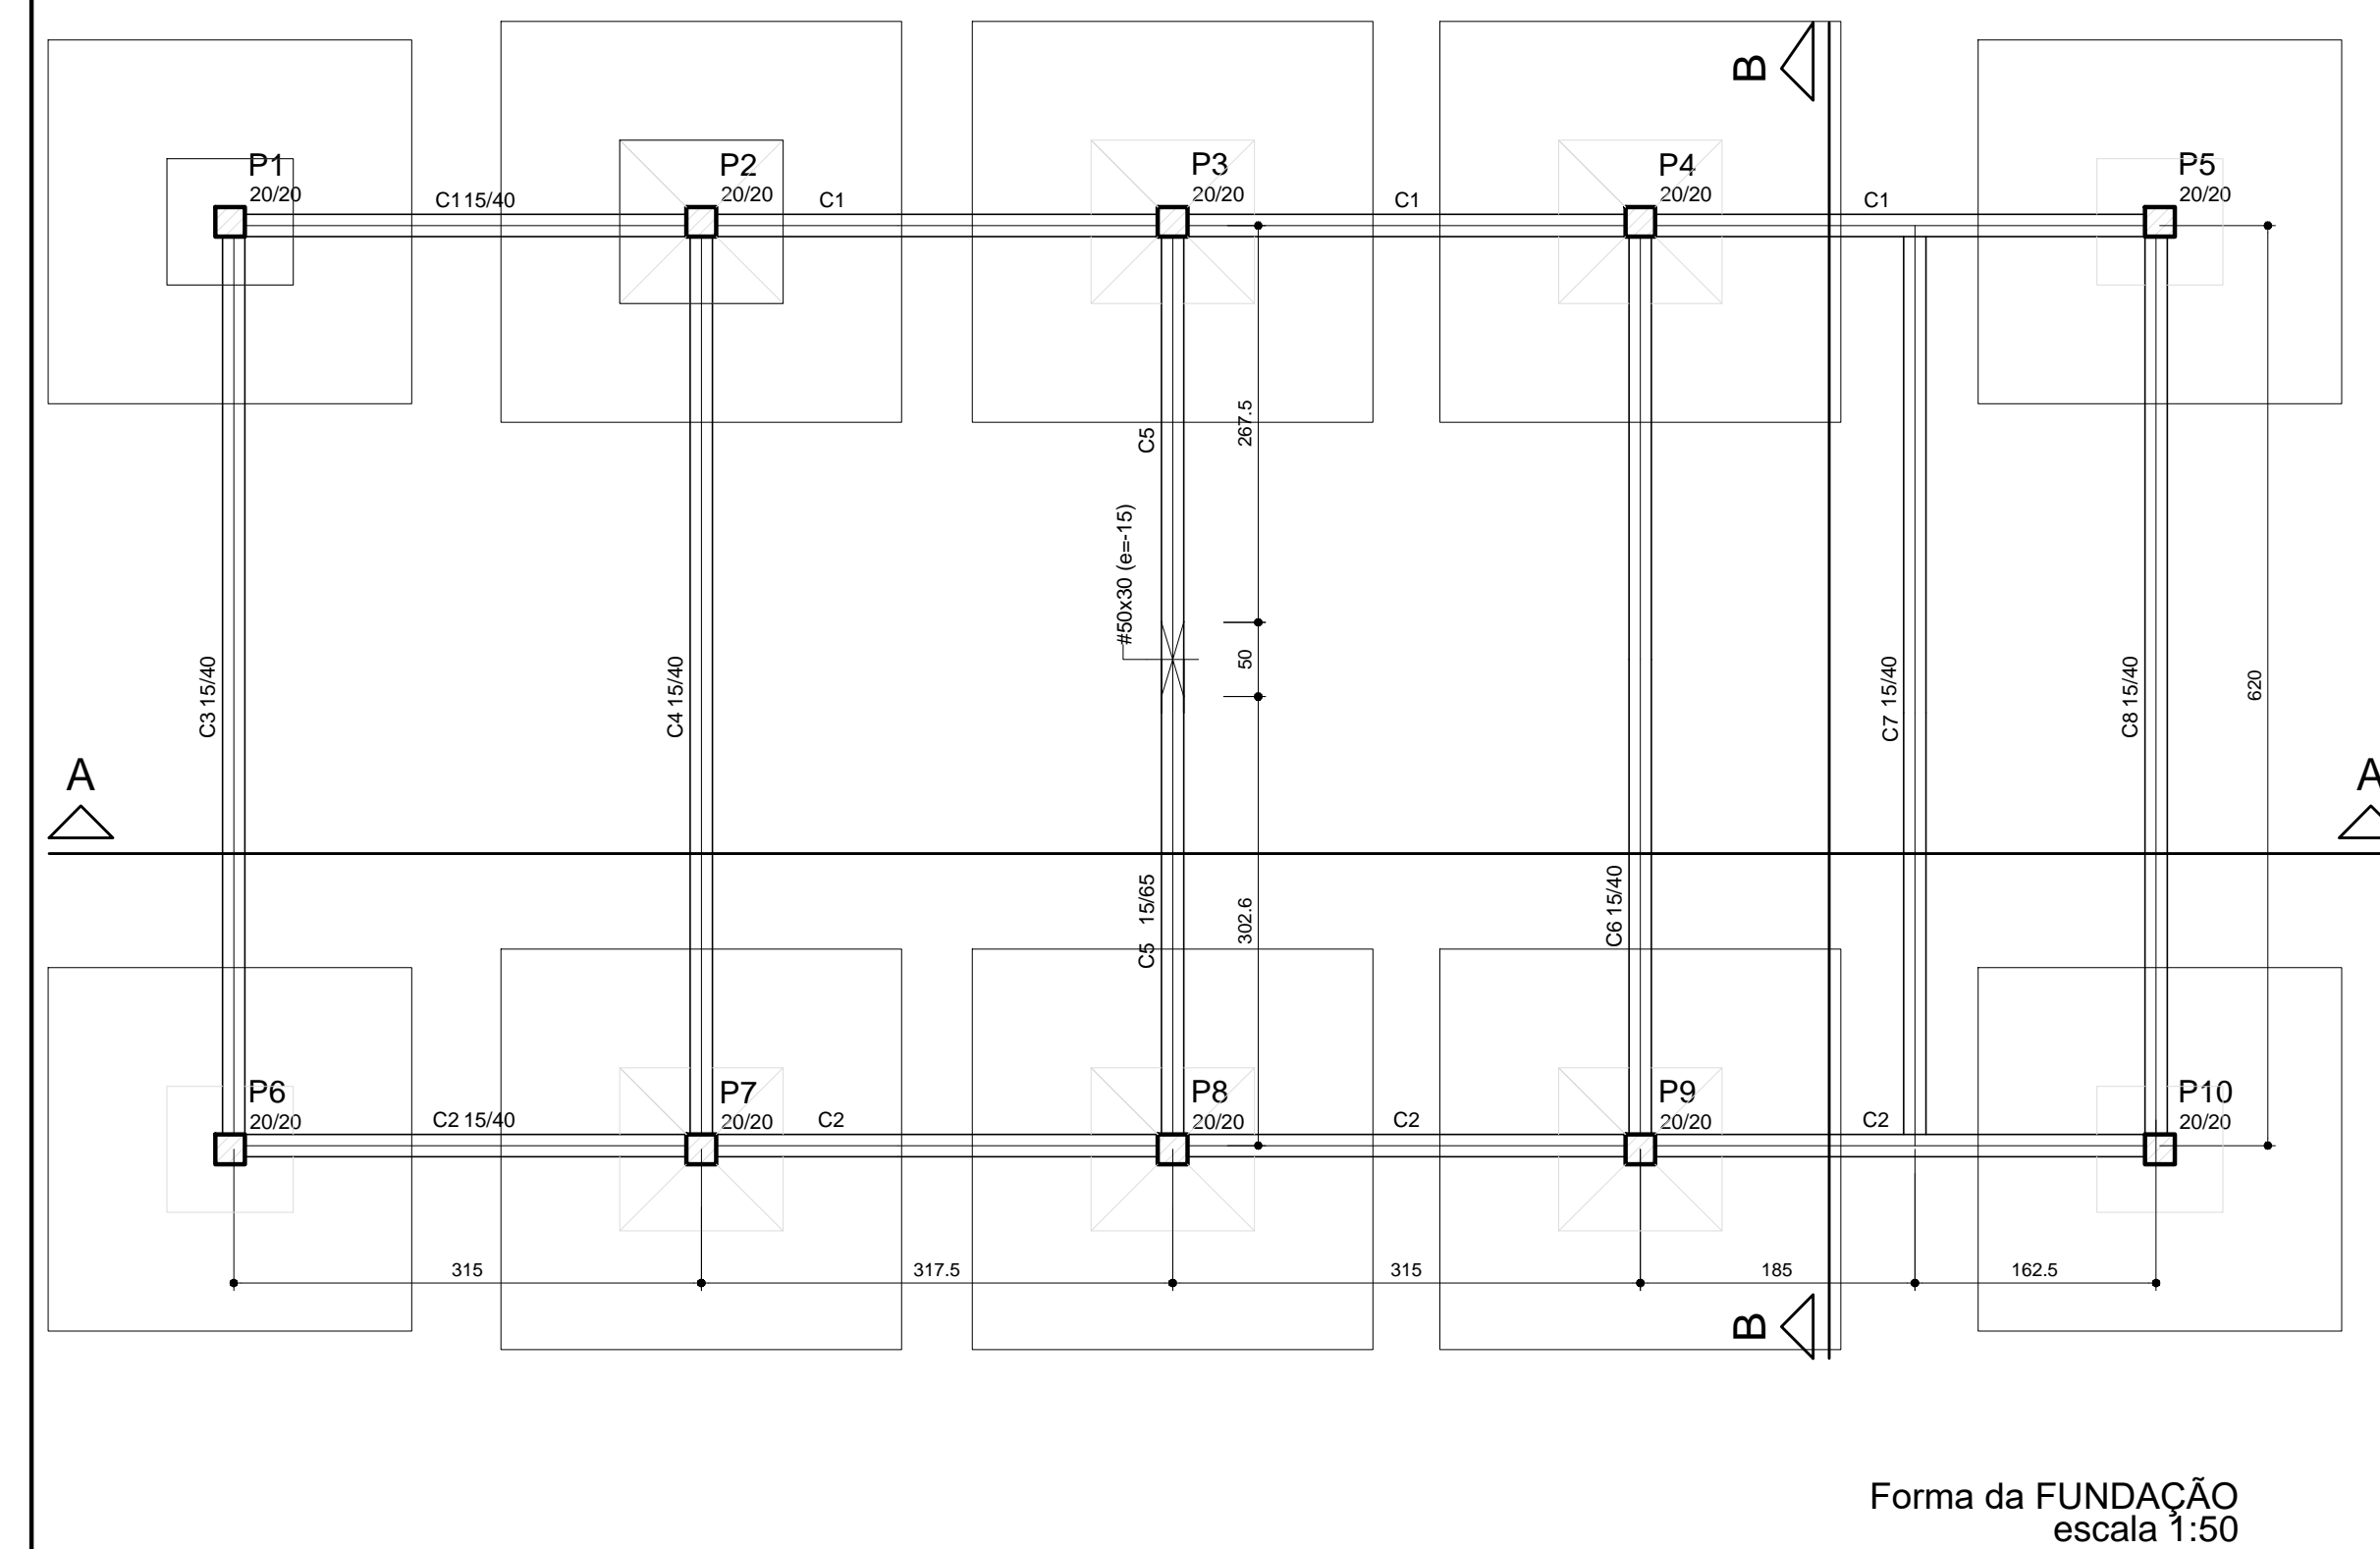


fck (kgf/cm ²)	Ecs (kgf/cm ²)
300	260716



Nome	Seção	Pilar				Fundação				
		X (cm)	Y (cm)	Carga Máx. (tf)	Carga Mín. (tf)	Lado B (cm)	Lado H (cm)	h0 / ha (cm)	h1 / hb (cm)	df (cm)
P1	20x20	10.00	-10.00	8.1	7.3	85	85	25	25	130
P2	20x20	327.50	-10.00	14.2	12.9	110	110	20	30	130
P3	20x20	677.50	-10.00	13.7	12.3	110	110	20	30	130
P4	20x20	992.50	-10.00	12.0	10.8	110	110	20	30	130
P5	20x20	1310.00	-10.00	8.3	7.6	85	85	25	25	130
P6	20x20	10.00	-680.00	8.2	7.4	85	85	25	25	130
P7	20x20	327.50	-680.00	13.6	12.3	110	110	20	30	130
P8	20x20	677.50	-680.00	12.1	10.7	110	110	20	30	130
P9	20x20	992.50	-680.00	11.1	9.8	110	110	20	30	130
P10	20x20	1310.00	-680.00	8.3	7.6	85	85	25	25	130

Lajes					
Nome	Tipo	Altura (cm)	Elevação (cm)	Nível (cm)	Sobrecarga (kgf/m²)
L1	Maciça	15	0	345	200

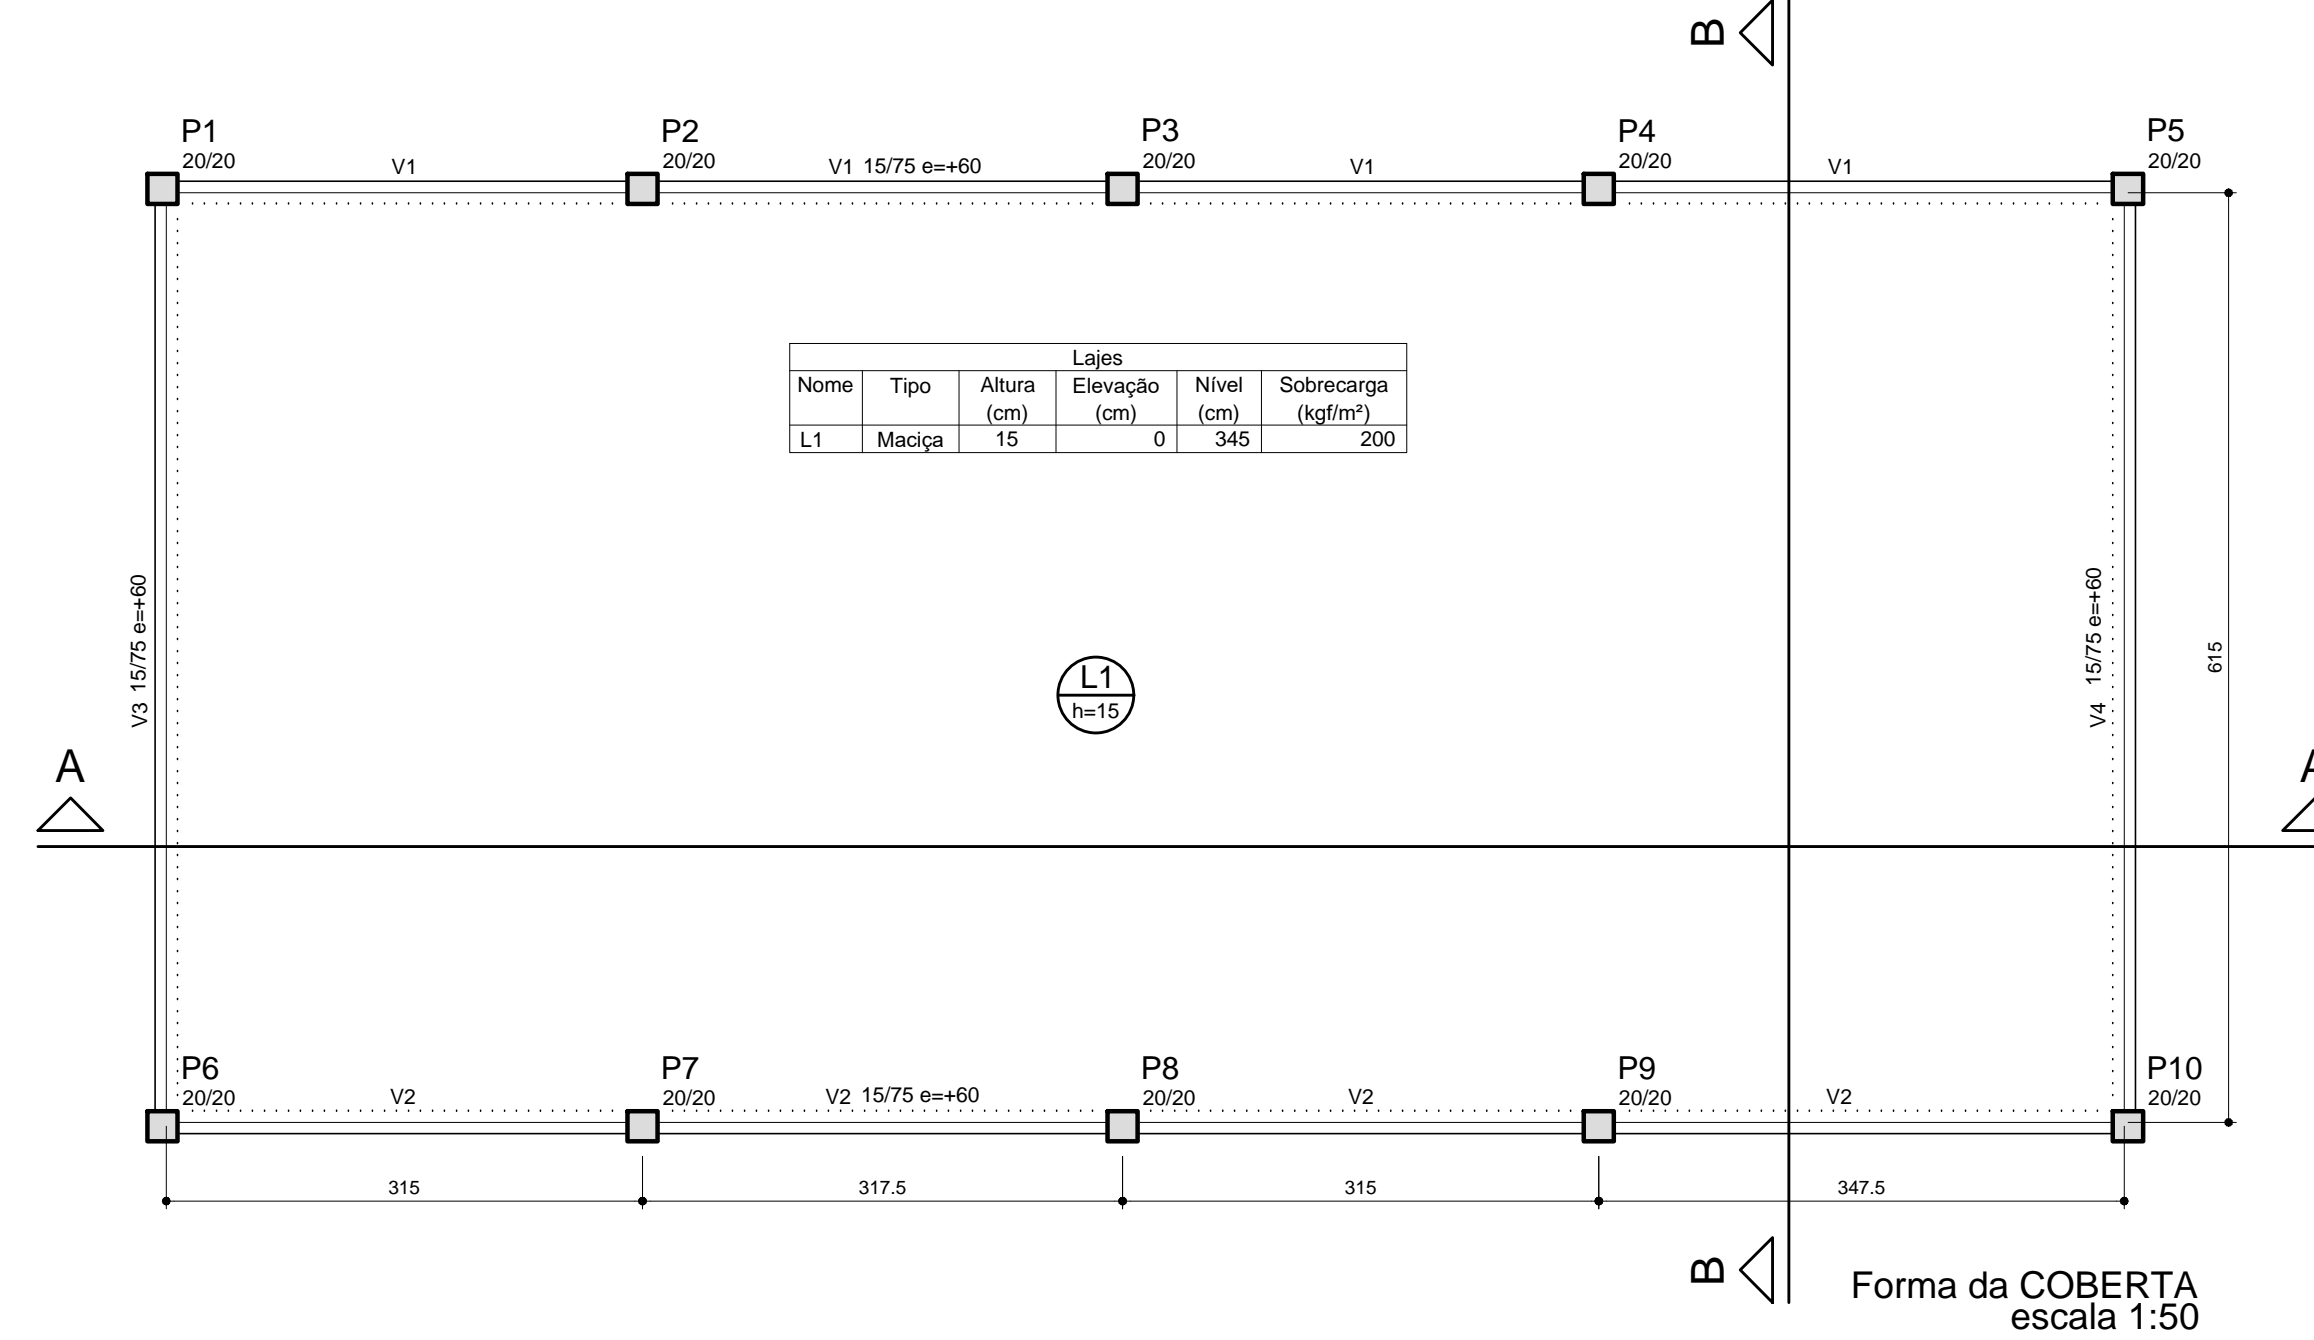

Vigas			
Nome	Seção (cm)	Elevação (cm)	Nível (cm)
C1	15x40	0	25
C2	15x40	0	25
C3	15x40	0	25
C4	15x40	0	25
C5	15x65	0	25
C6	15x40	0	25
C7	15x40	0	25
C8	15x40	0	25

Características dos materiais	
fck (kgf/cm ²)	Ecs (kgf/cm ²)
300	260716

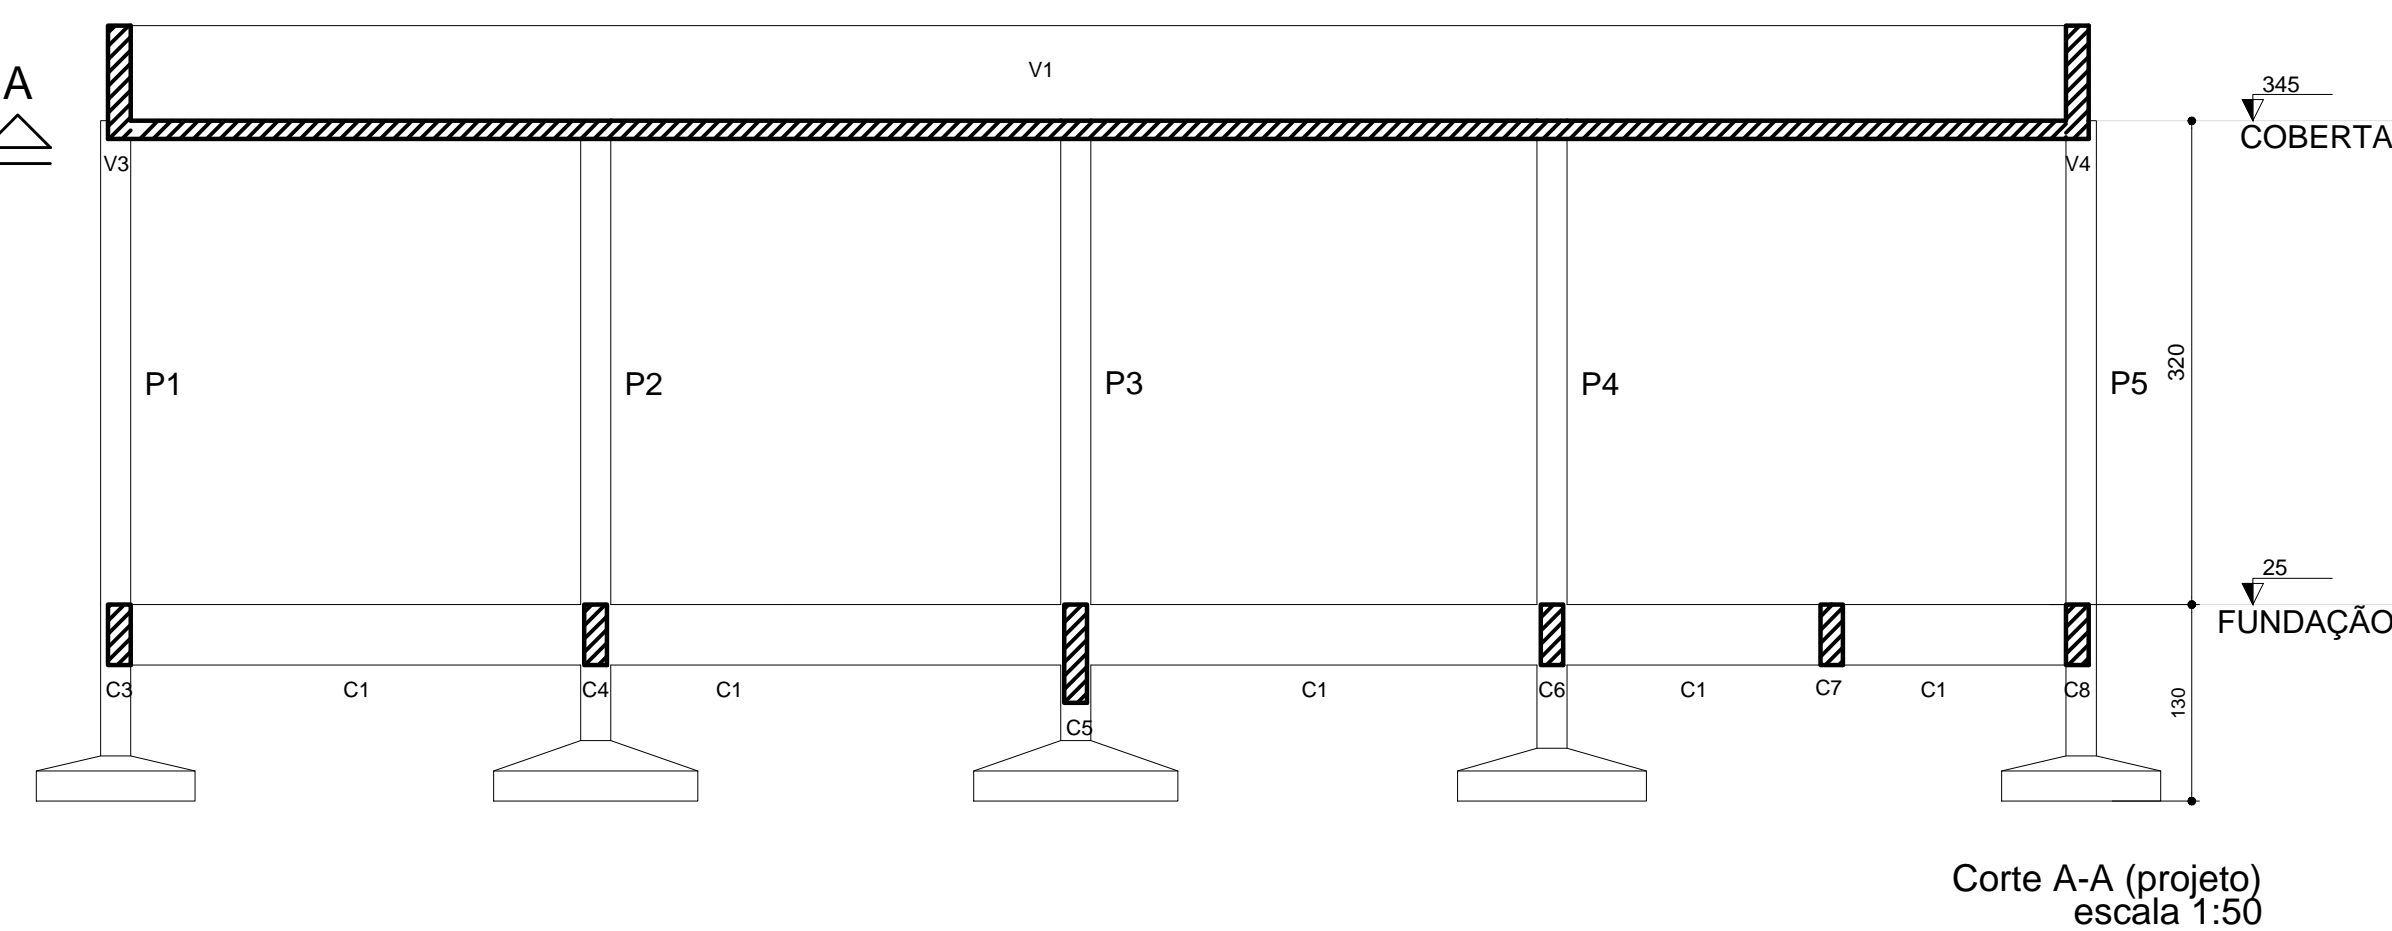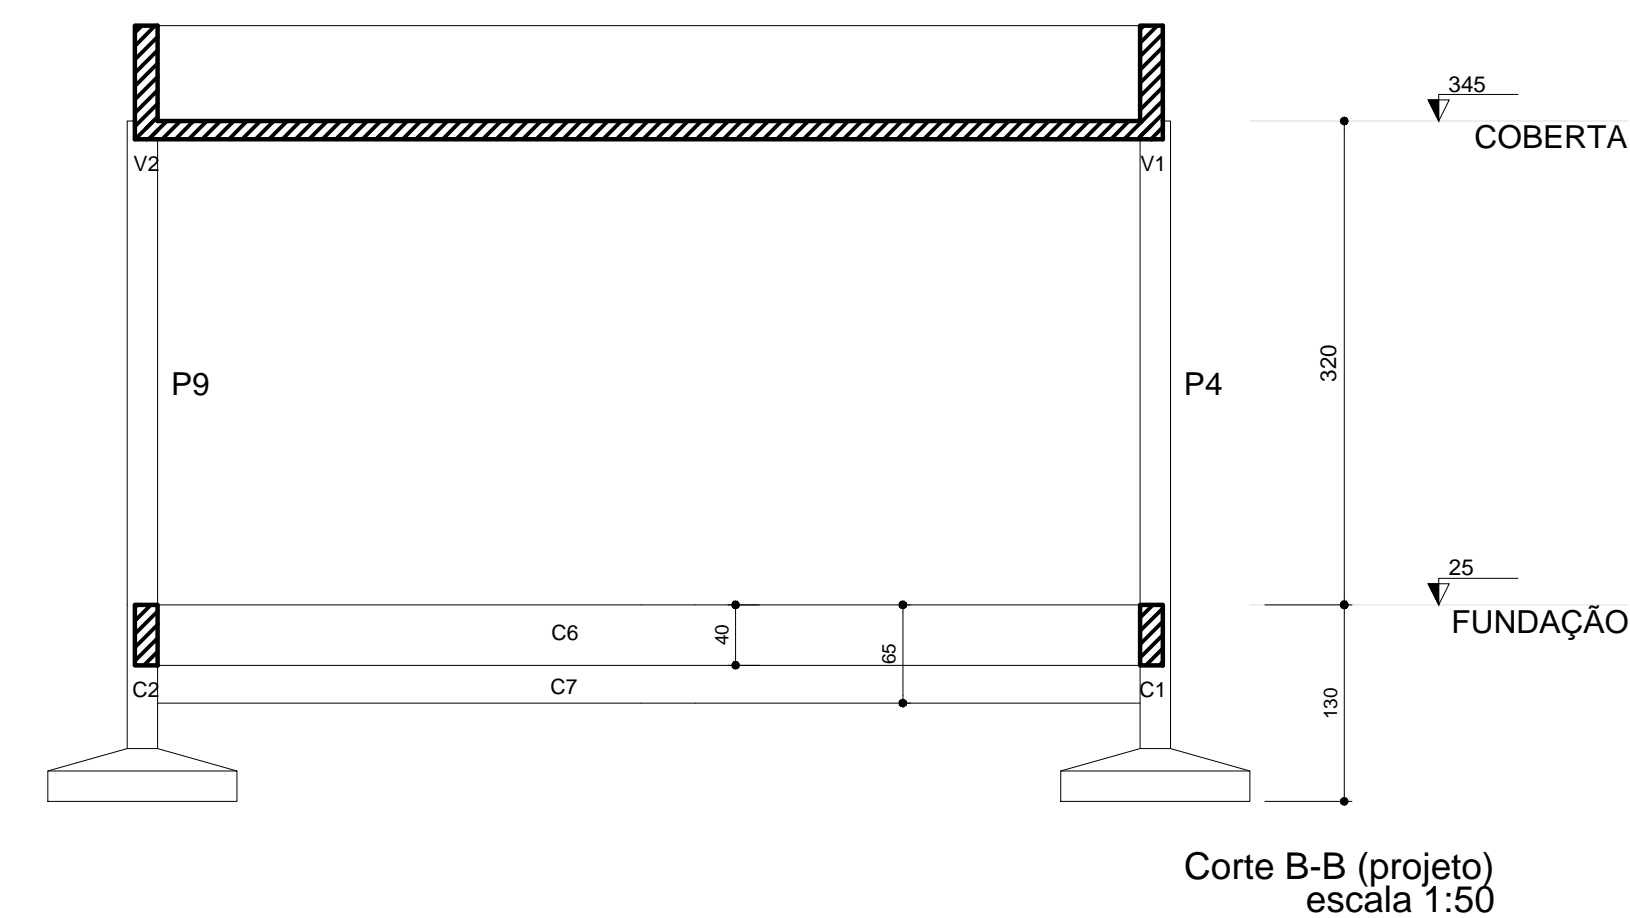[illegible]